


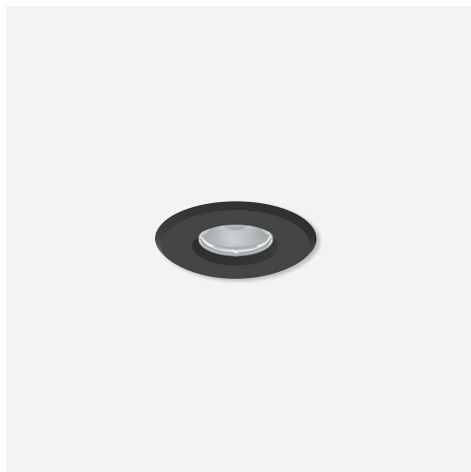

NORA[®]
LIGHTING

CAN-LESS RECESSED

1" TO 8" APERTURES

100 TO 3300 LUMENS



At Nora Lighting, we're committed to bringing innovation and efficiency to every space. Our new Can-less Lighting Catalog showcases the cutting-edge solutions that eliminate the need for traditional recessed cans, offering sleek, energy-efficient alternatives without compromising on performance or design. From seamless integration into ceilings to versatile applications, our can-less products are crafted to elevate your lighting experience. Whether you're designing residential or commercial spaces, we're excited to provide the ideal solutions to meet your needs while enhancing sustainability and style.

We understand that every project is unique, which is why we offer a wide range of can-less lighting styles and options to fit various design aesthetics and budgets. From more luxury designs to budget-conscious solutions, our products provide the flexibility and value you need to create the perfect lighting scheme for any space. At Nora Lighting, we're dedicated to delivering quality, performance, and value in every fixture.

Explore our latest collection and discover the freedom of can-less lighting, where innovation meets simplicity.

Table of Contents

M1 Series (1" 12V)P. 5

M1 Series (1" 120V)P. 9

M2 Series (2").....P. 13

M4 Series (4")..... P. 19

Iolite Series (1", 2" & 4") P. 23

M-Wave Series (2" & 4" Adjustable) P. 27

M-Curve Series (4" & 6" Adjustable).....P. 31

Fire Rated Series (4" & 6" Regressed & Thin Wafer) P. 35

FLAT Series (4" & 6" Thin Wafer) P. 39

FLIN Series (4" & 6" Regressed Wafer)P. 43

FLIN Adjustable Series (4" & 6" Wafer)..... P. 47

Theia Series (4", 6" & 8").....P. 51

Quartz Series (4", 6" & 8")..... P. 55


Comparison Chart P. 58





CAN-LESS

NO HOUSING REQUIRED

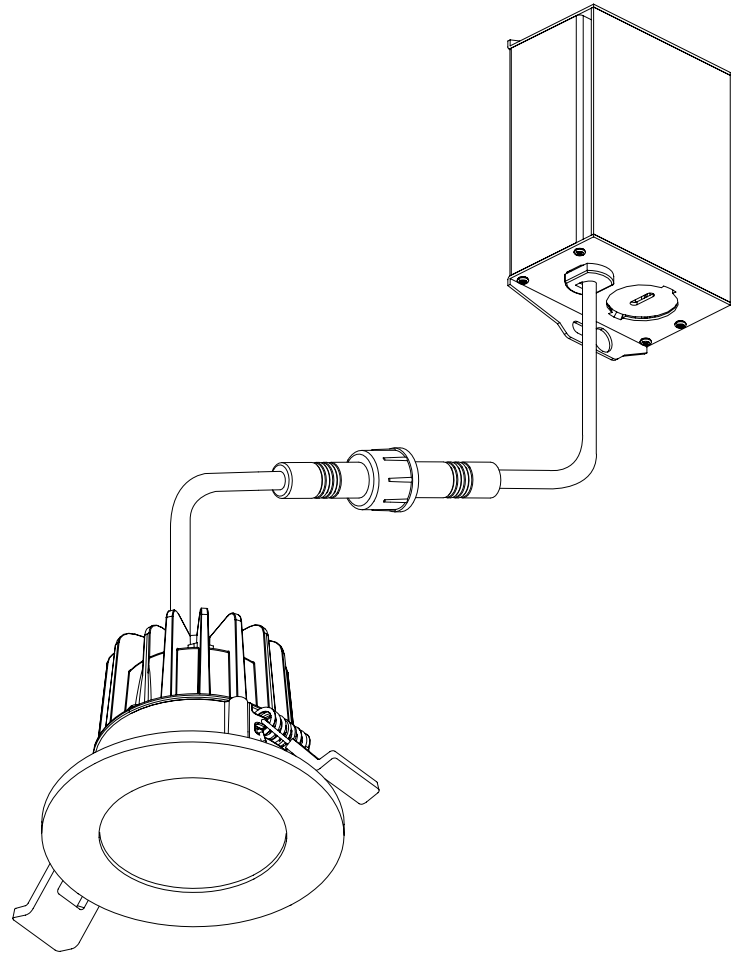

Standard recessed downlights require a housing.
Can-less downlights include a pre-wired junction box.
No housing is required!





M1
1" 12V



TRIMS

Aperture Size

1"

Shape

Round or Square

Type

Round Stainless Steel,
Square Stainless Steel, Scoop, Louver,
Hexcell, Stainless Steel Indicator

Finish

-  Black
-  Brushed Nickel
-  White

LIGHT OUTPUT

Lumens / Wattage

100lm / 2W

Color Temperature

Dedicated CCT



Color Rendering Index

90+ CRI

Optic

Field Changeable
(Four optics included)

ELECTRICAL

Input Voltage

12VDC

Dimming

Driver Ordered Separately

Listings & Warranty



IC Rated



cETLus Listed



Wet Location



FCC Compliant

M1

1" 12V

LUMINAIRE



NM1-170

12V LED Module with
(4) Round & Square Trims

CCT

☐ NM1-17027X2PBW	2700K
☐ NM1-17030X2PBW	3000K

Example: **NM1-17030X2PBW** = 1" M1 3000K LED Module & (4) Trims

TRIM ACCESSORIES



NM1-RAEYELID

Round Scoop Trim



NM1-RAIHEC

Round Hexcell Trim



NM1-RLouv

Round Louver Trim

FINISH:



B = Black



BN = Brushed Nickel



W = White



NM1-RSSD

Round Stainless Steel Indicator
Trim



NM1-RSS

Round Stainless Steel Trim



NM1-SSS

Square Stainless Steel Trim

Trim Accessory		Finish	
☐ NM1-RAEYELID	Round Scoop Trim	☐ B	Black
☐ NM1-RAIHEC	Round Hexcell Trim	☐ BN	Brushed Nickel
☐ NM1-RLouv	Round Louver Trim	☐ W	White
☐ NM1-RSSD	Round Stainless Steel Indicator Trim		
☐ NM1-RSS	Round Stainless Steel Trim		
☐ NM1-SSS	Square Stainless Steel Trim		

Example: **NM1-RSSW** = 1" Round Stainless Steel Trim, White Finish

12VDC DRIVERS



NM1-DVR12

12W Non-Dimmable Driver



NAPKED-5040HW

40W Dimmable Driver



NAPKED-5060HW

60W Dimmable Driver



NPSU-60W/12

60W Universal Dimming Driver




NM1-HWPC/24

24" Power Feed for Drivers

12VDC Drivers

- ☐ **NM1-DVR12** 12W Non-Dimmable Driver
- ☐ **NAPKED-5040HW** 40W Dimmable Driver
- ☐ **NAPKED-5060HW** 60W Dimmable Driver
- ☐ **NPSU-60W/12** 60W Universal Dimming Driver
- ☐ **NM1-HWPC/24** 24" Power Feed for Drivers

MOUNTING ACCESSORIES



NM1-F

Frame-In Plate



NM1-EXT

Extension Cables



NM1-TM6

Splitter Cable (1 in - 6 out)



NM1-WH6

Wire Harness System

Mounting Accessories

- ☐ **NM1-F** Frame-In Plate
- ☐ **NM1-EXT6** 6" Extension Cable
- ☐ **NM1-EXT12** 12" Extension Cable
- ☐ **NM1-EXT18** 18" Extension Cable
- ☐ **NM1-EXT48** 48" Extension Cable
- ☐ **NM1-EXT240** 240" Extension Cable

Mounting Accessories

- ☐ **NM1-TM6** Splitter Cable (1 input - 6 output)
- ☐ **NM1-WH6** Wire Harness System (1 input - 6 output)



Scan for info.



M1+
1" 120V



TRIMS

Aperture Size

1"

Shape

Round or Square

Type

Downlight

Finish



Matte Black



Bronze



Matte Power White

LIGHT OUTPUT

Lumens / Wattage

600lm / 9W

Color Temperature

Dedicated CCT



Color Rendering Index

90+ CRI

Optic

Fixed

ELECTRICAL

Input Voltage

120VAC

Dimming

Triac or ELV

Listings & Warranty



IC Rated



Air Tight



cETLus Listed



Wet Location



FCC Compliant




Title 24 Compliant

M1+

1" 120V

LUMINAIRE



NM1-PRDC

Round Downlight

FINISH:

- BB = Matte Black
- BZ = Bronze
- MPW = Matte Powder White

CCT		Finish	
☐ NM1-PRDCL127	2700K	☐ BB	Matte Black
☐ NM1-PRDCL130	3000K	☐ BZ	Bronze
		☐ MPW	Matte Power White

Example: NM1-PRDCL130MPW = 1" M1+ Round Downlight, 3000K, Matte Powder White finish

TRIM ACCESSORIES




NM1-PSDT

Square Trim

Trim Accessory		Finish	
☐ NM1-PSDT	Square Trim	☐ BB	Matte Black
		☐ BZ	Bronze
		☐ MPW	Matte Power White

Example: NM1-PSDTBZ = 1" Square Trim, Bronze Finish

MOUNTING ACCESSORIES



NF-R2

Frame-In



NMA-EW

Extension Cables

Mounting Accessory

- ☐ **NF-R2** New Construction Frame-In
- ☐ **NMA-EW-4** 4' Extension Cable
- ☐ **NMA-EW-10** 10' Extension Cable

REMOTE EMERGENCY



NEPK-23LEDUNV

23W Emergency Battery



NEPK-20/23LEDRTS

Ribbon Test Switch

Emergency Options

- ☐ **NEPK-23LEDUNV** 23W Battery with Remote Test Switch
- ☐ **NEPK-20/23LEDRTS** Ribbon Test Switch



Scan for info.



M2

2" & Multiples



TRIMS

Aperture Size

2"

Shape

Round, Square, Multiples

Type

Downlight, Trimless, Gimbal, Elbow

Finish



Matte Black



Matte Power White

LIGHT OUTPUT

Lumens / Wattage

400lm / 6W, 600lm / 8W,
850lm / 10W, 900lm / 10W

Color Temperature



2700K



3000K



4000K(2RDC, 2RDCS, 2RG, 2RTLDC)

Color Rendering Index

90+ CRI

Optic

Fixed
(Elbow includes two optics)

ELECTRICAL

Input Voltage

120VAC

Dimming

Phase (Triac or ELV)

Listings & Warranty



IC Rated



Air Tight



cETLs Listed



Wet Location (Adjustable is Damp)



FCC Compliant



Title 24 Compliant





M2

2" Trimless



TRIMS

Aperture Size

2"

Shape

Round

Type

Downlight

Finish

 Matte Black

 Matte Power White

LIGHT OUTPUT

Lumens / Wattage

750lm / 8W
900lm / 10W

Color Temperature

Dedicated CCT

 2700K  3000K  4000K

Color Rendering Index

90+ CRI

Optic

Fixed

ELECTRICAL

Input Voltage

120VAC

Dimming

Triac or ELV

Listings & Warranty

 IC Rated

 Air Tight

 cETLus Listed

 Damp Location


 FCC Compliant

 Title 24 Compliant

M2

2", Multiples & Trimless

2" ROUND LUMINAIRES




NM2-2RDC

2" Downlight




NM2-2RTLDC

2" Trimless Downlight



NM2-2RG

2" Adjustable Gimbal



NM2-2R270

2" Adjustable Elbow

Trim Type		Lumens / Wattage	CCT	Finish
☐ NM2-2RDC	Open Downlight	☐ 40 400lm / 6W	☐ 27 2700K	☐ BB Matte Black
☐ NM2-2RDCL	Lensed Downlight	☐ 60 600lm / 8W	☐ 30 3000K	☐ MPW Matte Power White
☐ NM2-2RTLDC	Trimless Downlight	☐ 85 850lm / 10W	☐ 40 4000K	
☐ NM2-2RG	Adjustable Gimbal	☐ 40 400lm / 6W	☐ 27 2700K	☐ BB Matte Black
		☐ 60 600lm / 8W	☐ 30 3000K	☐ MPW Matte Power White
			☐ 40 4000K	
☐ NM2-2R270	Adjustable Elbow	☐ 50 500lm / 12W	☐ 27 2700K	☐ BB Matte Black
			☐ 30 3000K	☐ MPW Matte Power White

FINISH:




BB = Matte Black



MPW = Matte Powder White


Example: **NM2-2RDC8530BB** = 2" M2 Round Downlight, 850lm, 3000K, Matte Black Finish

2" SQUARE LUMINAIRES



NM2-2SB

2" Square Baffle




NM2-2SDC

2" Square Downlight

Trim Type		Lumens / Wattage	CCT	Finish
☐ NM2-2SB	Square Baffle	☐ 60 600lm / 8W	☐ 27 2700K	☐ BB Matte Black
☐ NM2-2SDC	Square Downlight	☐ 85 850lm / 10W	☐ 30 3000K	☐ MPW Matte Power White


Example: **NM2-2SDC8530BB** = 2" M2 Square Downlight, 850lm, 3000K, Matte Black Finish

MULTIPLES LIGHTING SYSTEM PLATES



NM2-MLS1

One-Head Plate



NM2-MLS2

Two-Head Plate




NM2-MLS3

Three-Head Plate

Number of Head(s)		Finish
☐ NM2-MLS1	One Head	☐ BB Matte Black
☐ NM2-MLS2	Two Heads	☐ MPW Matte Power White
☐ NM2-MLS3	Three Heads	

Example: **NM2-MLS2BB** = M2 Two-Head Multiple Plate, Black Finish

TRIM ACCESSORIES

  NM2-2SDT for NM2-2RDC NM2-2SGT for NM2-2RG NM2-2SET for NM2-2R270 Square Trim	  NM2-2RPH for NM2-2RDC Pinhole Trim	  NM2-2RW for NM2-2RDC Wall Wash Trim	  NM2-2REFL Reflector Insert NM2-2BAF Baffle Insert Reflector or Baffle Insert for NM2-2RDC
---	--	--	---



Square Trim Accessory	Finish
☐ NM2-2SDT for NM2-2RDC	☐ B Matte Black
☐ NM2-2SGT for NM2-2RG	☐ MPW Matte Power White
☐ NM2-2SET for NM2-2R270	

Example: **NM2-2SDTB** = Square Trim for NM2-2RDC, Matte Black Finish

Trim Accessory for NM2-RDC	Finish
☐ NM2-2RPH Pinhole Trim	☐ B Matte Black
☐ NM2-2RW Wall Wash Trim	☐ MPW Matte Power White
☐ NM2-2BAF Baffle Insert	
☐ NM2-2REFL Reflector Insert	☐ B Matte Black
	☐ HZ Haze

Example: **NM2-2RPHB** = Pinhole Trim, Black Finish

MOUNTING ACCESSORIES

 NM2-TLMR-R Trimless Mud Plate for NM2-2RTLDC	 NF-R246 Universal Frame-In	 NFC-R275 Frame-In with Collar	 NM2-EW for all except NM2-2RTLDC NMA-EW for NM2-2RTLDC only Extension Cables
---	--	--	---

Mounting Accessory
☐ NM2-TLMR-R Trimless Mud Plate for NM2-2RTLDC
☐ NF-R246 Universal Frame-In
☐ NFC-R275 Frame-In with Collar

Extension Cables
☐ NM2-EW-4 4' Extension Cable for all, except NM2-2RTLDC
☐ NM2-EW-10 10' Extension Cable for all, except NM2-2RTLDC
☐ NMA-EW-4 4' Extension Cable for NM2-2RTLDC only
☐ NMA-EW-10 10' Extension Cable for NM2-2RTLDC only

REMOTE EMERGENCY

 NEPK-23LEDUNV 23W Emergency Battery	 NEPK-20/23LEDRTS Ribbon Test Switch
--	--

Emergency Options
☐ NEPK-23LEDUNV 23W Battery with Remote Test Switch
☐ NEPK-20/23LEDRTS Ribbon Test Switch



Scan for info.



M4
4"



TRIMS

Aperture Size

4"

Shape

Round or Square

Type

Downlight, Elbow, Gimbal

Finish



Matte Black



Matte Power White

LIGHT OUTPUT

Lumens / Wattage

950lm / 12W (NM4-RG & NM4-R470)
1150lm / 15W (NM4-RDC)

Color Temperature

Dedicated CCT



Color Rendering Index

90+ CRI

Optic

Fixed
(Elbow includes two optics)

ELECTRICAL

Input Voltage

120VAC

Dimming

Triac or ELV

Listings & Warranty



IC Rated



Air Tight



cULus Listed



Wet Location (Elbow is Damp)



FCC Compliant




Title 24 Compliant

M4

4"

LUMINAIRES




NM4-RDC

4" Downlight



NM4-RG

4" Adjustable Gimbal



NM4-R470

4" Adjustable Elbow

Trim Type		CCT	Finish
☐ NM4-RDC	Open Downlight	☐ 27 2700K	☐ BB Matte Black
☐ NM4-RG	Adjustable Gimbal	☐ 30 3000K	☐ MPW Matte Power White
☐ NM4-R470	Adjustable Elbow		

Example: NM4-RDC30BB = 4" M4 Round Downlight, 3000K, Matte Black Finish

FINISH:



BB = Matte Black




MPW = Matte Powder White

TRIM ACCESSORIES



NM4-SDT

Square Baffle Trim for NM4-RDC



NM4-SET

Square Trim for NM4-R470


Square Trim Accessory

Finish

☐ NM4-SDT	for NM4-RDC	☐ B	Matte Black
☐ NM4-SET	for NM4-R470	☐ MPW	Matte Power White


Example: **NM4-SDTB** = Square Trim for NM4-RDC, Matte Black Finish

MOUNTING ACCESSORIES



NF-R246 for NM4-RG & NM4-R470

Universal Frame-In

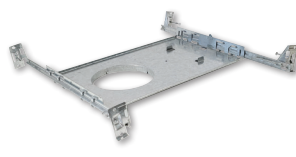

NFC-R430 for NM4-RG & NM4-R470

NFC-R375 for NM4-RDC

Frame-In with Collar



NM2-EW

Extension Cables

Mounting Accessory

☐ NF-R246	Universal Frame-In for NM4-RG & NM4-R470
☐ NFC-R430	Frame-In with Collar for NM4-RG & NM4-R470
☐ NFC-R375	Frame-In with Collar for NM4-RDC
☐ NM2-EW-4	4' Extension Cable
☐ NM2-EW-10	10' Extension Cable

REMOTE EMERGENCY



NEPK-23LEDUNV

23W Emergency Battery



NEPK-20/23LEDRTS

Ribbon Test Switch

Emergency Options

☐ NEPK-23LEDUNV	23W Battery with Remote Test Switch
☐ NEPK-20/23LEDRTS	Ribbon Test Switch



Scan for info.



IOLITE

1", 2" & 4"



TRIMS

Aperture Size

1", 2" & 4"

Shape

Round or Square

Type

Downlight, Adjustable, Sloped

Finish



Black



Haze / White



Haze / Matte Power White



Matte Power White



White

LIGHT OUTPUT

Lumens / Wattage

1" / 900lm / 9W

2" / 1250lm / 12W

4" / 1250lm / 12W

Color Temperature

Dedicated CCT



Color Rendering Index

90+ CRI

Optic

Field Changeable
(Spot, Narrow Flood and Flood included)

ELECTRICAL

Input Voltage

120VAC

Dimming

Triac or ELV

Listings & Warranty



IC Rated



Air Tight



cULus Listed



Wet Location



FCC Compliant



Title 24 Compliant

IOLITE

1", 2" & 4"

1" TRIMS



NIOC-1RNB

1" Round Bullnose



NIOC-1RNG

1" Round Downlight



NIOC-1SNG

1" Square Downlight

FINISH:



B = Black



HZW = Haze / White



HZMPW = Haze / Matte Powder White



MPW = Matte Powder White



W = White

Trim Type

- ☐ **NIOC-1RNG** 1" Round Downlight
- ☐ **NIOC-1SNG** 1" Square Downlight
- ☐ **NIOC-1RNB** 1" Round Bullnose

Finish

- ☐ **HW** Haze / White
- ☐ **MPW** Matte Powder White
- ☐ **WW** White

Example: **NIOC-1RNGHW** = 1" Round Downlight, Haze Reflector / White Finish

2" TRIMS



NIOC-2RPH

2" Pinhole



NIOC-2RNB

1" Round Bullnose



NIOC-2RND

2" Round Downlight



NIOC-2SND

2" Square Downlight

Trim Type

- ☐ **NIOC-2RND** 2" Round Downlight
- ☐ **NIOC-2SND** 2" Square Downlight
- ☐ **NIOC-2RPH** 2" Round Pinhole
- ☐ **NIOC-2RNB** 2" Round Bullnose

Finish

- ☐ **HW** Haze / White
- ☐ **HZMPW** Haze / Matte Powder White
- ☐ **MPW** Matte Powder White
- ☐ **WW** White

Example: **NIOC-2RNDCHW** = 2" Round Downlight, Haze Reflector / White Finish

4" TRIMS



NIOC-4RPH

4" Pinhole




NIOC-4RNB

4" Round Bullnose




NIOC-4RND

4" Round Downlight



NIOC-4SND

4" Square Downlight



NIOC-4RSP

4" Round Sloped Downlight



NIOC-4RSLA

4" Round Slot Adjustable

Trim Type

- ☐ **NIOC-4RND** 4" Round Downlight
- ☐ **NIOC-4SND** 4" Square Downlight
- ☐ **NIOC-4RPH** 4" Round Pinhole
- ☐ **NIOC-4RNB** 4" Round Bullnose
- ☐ **NIOC-4RSLA** 4" Round Slot Adjustable
- ☐ **NIOC-4RSP** 4" Round Sloped Ceiling

Finish

- ☐ **B** Black (NIOC-4RSP only)
- ☐ **HW** Haze / White
- ☐ **HZMPW** Haze / Matte Powder White
- ☐ **MPW** Matte Powder White
- ☐ **WW** White


Example: **NIOC-4RNDCHW** = 4" Round Downlight, Haze Reflector / White Finish

REMOTE DRIVERS



NJCB-09

1" Remote Driver



NJCB-12

2" & 4" Remote Driver

Driver Box (REQUIRED)

- ☐ **NJCB-09** 9W Driver for NIOC-1LED
- ☐ **NJCB-12** 12W Driver for NIOC-24LED

LED MODULE



NIOC-1LED

1" 900lm LED Module



NIOC-24LED

2" & 4" 1250lm LED Module

LED Module (REQUIRED)

- ☐ **NIOC-1LED** 900lm module for 1"
- ☐ **NIOC-24LED** 1250lm module for 2" & 4"

TRIM ACCESSORIES



NIO-1AS14 5/8" length
NIO-1AS19 3/4" length
NIO-1AS26 1" length

Collar / Snoot
Accessory for 1" Trims



NIO-AS14 5/8" length
NIO-AS19 3/4" length
NIO-AS26 1" length

Collar / Snoot Accessory for 2" & 4" Trims



NIO-1HC for 1" Trims
NIO-HC for 2" & 4" Trims

Hex Cell Louver

1" Accessories

Finish

- ☐ **NIO-1AS14** 5/8" length ☐ **AM** Amber
- ☐ **NIO-1AS19** 3/4" length ☐ **BLU** Blue
- ☐ **NIO-1AS26** 1" length ☐ **FR** Frosted
- ☐ **MPW** Matte Powder White
- ☐ **R** Red

- ☐ **NIO-1HC** Hex Louver

Example: **NIO-1AS14BLU** = 5/8" Snoot, Blue Finish

2" & 4" Accessories


Finish

- ☐ **NIO-AS14** 5/8" length ☐ **AM** Amber
- ☐ **NIO-AS19** 3/4" length ☐ **BLU** Blue
- ☐ **NIO-AS26** 1" length ☐ **FR** Frosted
- ☐ **MPW** Matte Powder White
- ☐ **R** Red

- ☐ **NIO-HC** Hex Louver

Example: **NIO-AS26R** = 1" Snoot, Red Finish

MOUNTING ACCESSORIES & REMOTE EMERGENCY



NF-R124

Universal Frame-In



NFC-R231
NFC-R313
NFC-R413
NFC-R430

for 1" Trims
 for 2" Trims
 for 4" Trims
 for NIOC-4RSP only
 Frame-In with Collar



NCA-EW

Extension Cable



NEPK-23LEDUNV
NEPK-20/23LEDRTS

Battery Ribbon
 Battery includes remote test switch.

Mounting Accessories

- ☐ **NF-R124** Universal Frame-In
- ☐ **NFC-R231** Frame-In with Collar for 1" Trims
- ☐ **NFC-R313** Frame-In with Collar for 2" Trims
- ☐ **NFC-R413** Frame-In with Collar for 4" Trims
- ☐ **NFC-R430** Frame-In with Collar for NIOC-4RSP only
- ☐ **NCA-EW-4** 4' Extension Cable
- ☐ **NCA-EW-10** 10' Extension Cable

Emergency Options


- ☐ **NEPK-23LEDUNV** 23W Battery with Remote Test Switch
- ☐ **NEPK-20/23LEDRTS** Ribbon Test Switch





M-WAVE

2" & 4"

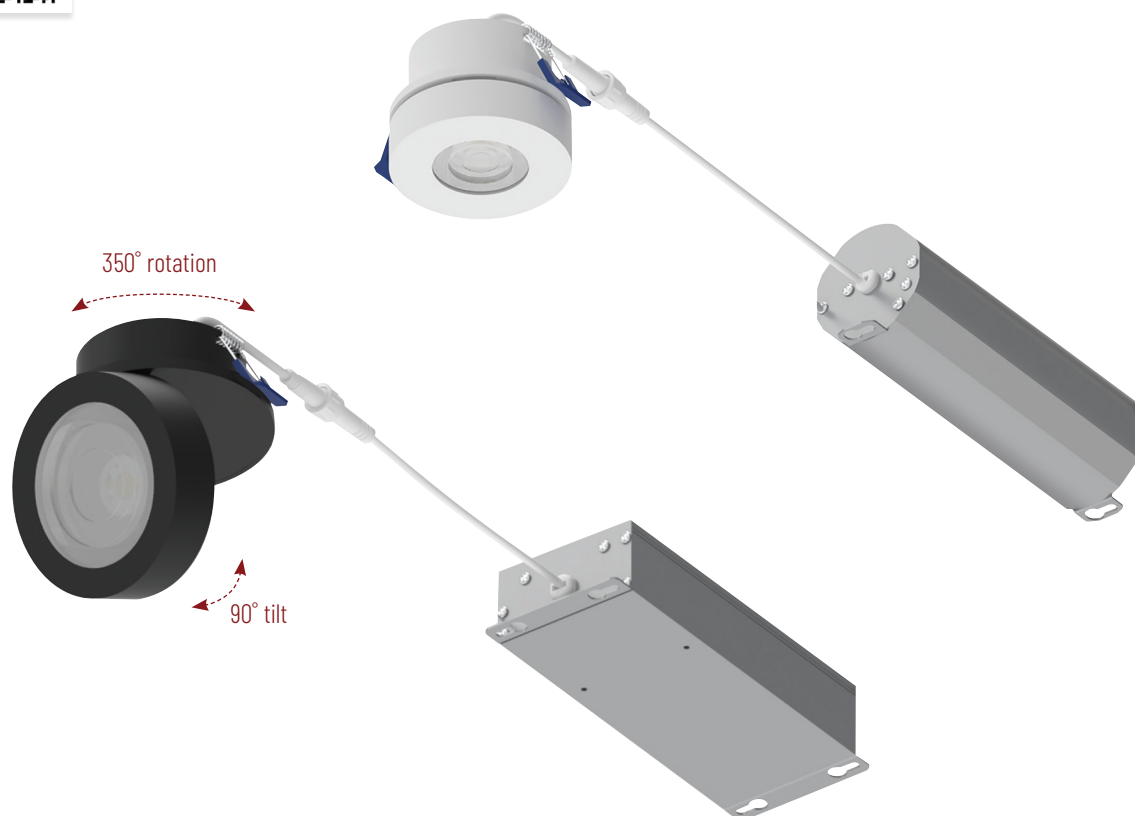

TRIMS

Aperture Size

2" & 4"

Shape

Round

Type

Adjustable Downlight
90° Tilt & 350° Rotation

Finish



Matte Black



Matte Power White

LIGHT OUTPUT

Lumens / Wattage

2" / 750lm / 9W
4" / 1250lm / 14W

Color Temperature

Dedicated CCT



Color Rendering Index

90+ CRI

Optic

Field Changeable
(Narrow Flood & Spot included)

ELECTRICAL

Input Voltage

120VAC

Dimming

Triac or ELV

Listings & Warranty



IC Rated



Air Tight



cULus Listed



Wet Location



FCC Compliant




Title 24 Compliant

M-WAVE

2" & 4"

LUMINAIRES

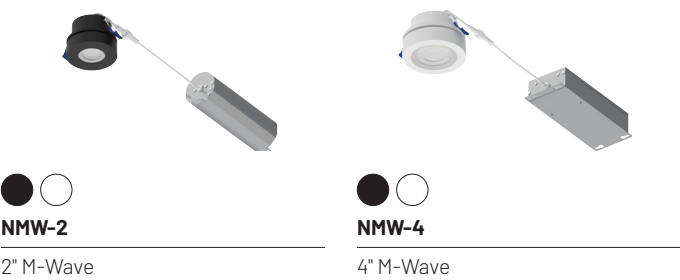

FINISH:

B = Matte Black

MPW = Matte Powder White

Size	CCT	Finish
☐ NMW-2 2" M-Wave	☐ 27 2700K	☐ B Matte Black
☐ NMW-4 4" M-Wave	☐ 30 3000K	☐ MPW Matte Powder White

Example: **NMW-430B** = 4" M-Wave, 3000K, Matte Black Finish


REPLACEMENT OPTICS



Optic	Beam Spread
☐ NMWA-20PT for 2" M-Wave	☐ SP Narrow Spot
☐ NMWA-40PT for 4" M-Wave	☐ NFL Spot

Example: **NMWA-20PTSP** = Spot Optic for 2" M-Wave

MOUNTING ACCESSORIES



NF-R124

Frame-In for 4" M-Wave



NCA-EW

Extension Cable

REMOTE EMERGENCY



NEPK-23LEDUNV

23W Emergency Battery



NEPK-20/23LEDRTS

Ribbon Test Switch

Emergency Options

☐ **NEPK-23LEDUNV**

☐ **NEPK-20/23LEDRTS**

23W Battery with Remote Test Switch

Ribbon Test Switch



Scan for info.




M-CURVE

4" & 6"



Selectable CCT

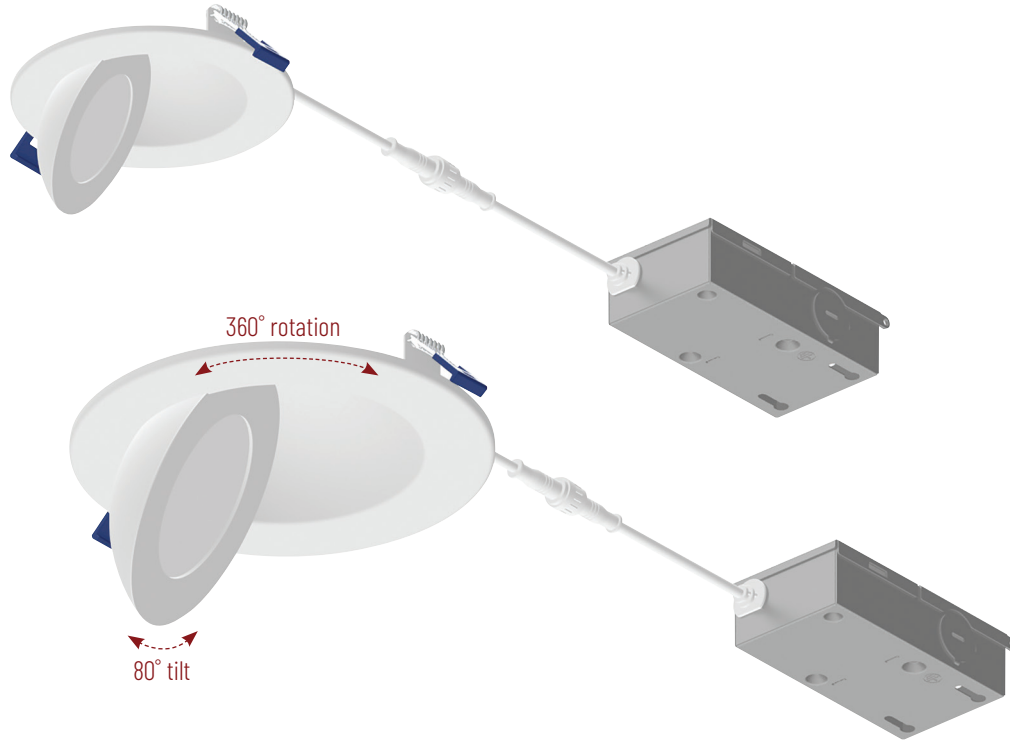

TRIMS

Aperture Size

4" & 6"

Shape

Round

Type

Adjustable Downlight
80° Tilt & 360° Rotation

Finish



Matte Powder White

LIGHT OUTPUT

Lumens / Wattage

4" / 900lm / 9W
6" / 1300lm / 13W

Color Temperature

Selectable CCT



Color Rendering Index

90+ CRI

Optic

Fixed - 48° Narrow Flood

ELECTRICAL

Input Voltage

120VAC

Dimming

Triac or ELV

Listings & Warranty



IC Rated



Air Tight



cETLus Listed



Wet Location



FCC Compliant



Title 24 Compliant


M-CURVE

4" & 6"

LUMINAIRES




NMC-4RTW
4" M-Curve




NMC-6RTW
6" M-Curve



Selectable CCT


FINISH:

 **MPW** = Matte Powder White

Size	CCT	Finish
☐ NMC-4R 4" M-Curve	TW Selectable CCT (27K/30K/35K/40K/50K)	MPW Matte Power White
☐ NMC-6R 6" M-Curve		

Example: **NMC-6RTWMPW** = 6" M-Curve, Selectable CCT, Matte Powder White Finish

MOUNTING ACCESSORIES



NFC-R375 for 4" M-Curve
NFC-R5 for 6" M-Curve

Frame-In with Collar

Mounting Accessory

- ☐ **NFC-R375** Frame-In with Collar for 4" M-Curve
- ☐ **NFC-R5** Frame-In with Collar for 6" M-Curve

REMOTE EMERGENCY



NEPK-20LEDUNV

20W Emergency Battery



NEPK-23LEDUNV

23W Emergency Battery



NEPK-20/23LEDRTS

Ribbon Test Switch

Emergency Options

- ☐ **NEPK-20LEDUNV** 20W Battery with Remote Test Switch
- ☐ **NEPK-23LEDUNV** 23W Battery with Remote Test Switch
- ☐ **NEPK-20/23LEDRTS** Ribbon Test Switch



Scan for info.




FIRE RATED

4" & 6"



Selectable CCT

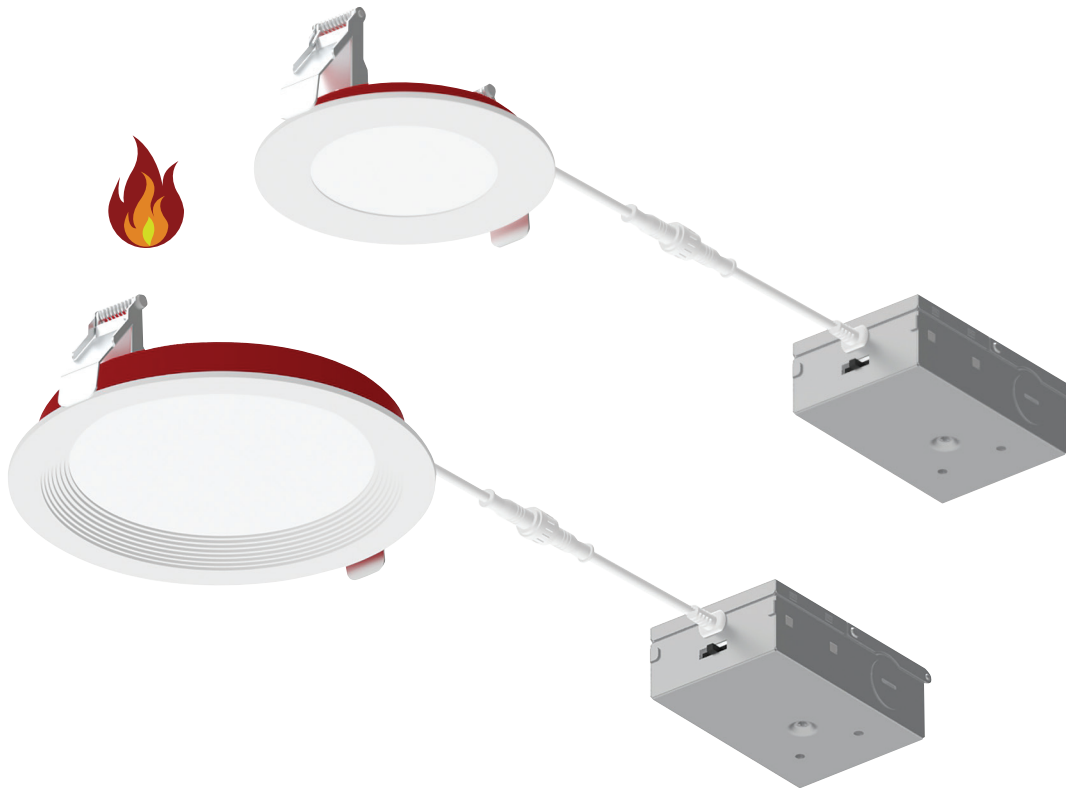

TRIMS

Aperture Size

4" & 6"

Shape

Round

Type

Flat Downlight or Regressed Baffle

Finish



Matte Powder White

LIGHT OUTPUT

Lumens / Wattage

4" / 1200lm / 12W
6" / 1550lm / 15W

Color Temperature

Selectable CCT

2700K

3000K

3500K

4000K

5000K

Color Rendering Index

90+ CRI

Optic

Fixed - 110° Wide Flood

ELECTRICAL

Input Voltage

120VAC

Dimming

Triac or ELV

Listings & Warranty



UL 263 & ASTM E119
2-Hour Fire Rating



IC Rated



Air Tight



cETLus Listed



Wet Location



FCC Compliant




Title 24 Compliant

FIRE RATED

4" & 6"

LUMINAIRES



NFRC-R4W1TW

4" Flat Downlight



NFRC-R4W2TW

4" Regressed Baffle



NFRC-R6W1TW

6" Flat Downlight



NFRC-R6W2TW

6" Regressed Baffle



Selectable CCT


FINISH:

MPW = Matte Powder White


Size		Trim Type		CCT	Finish	
☐ NFRC-R4	4" Fire Rated	☐ W1	Flat Downlight	TW Selectable CCT (27K/30K/35K/40K/50K)	MPW	Matte Power White
☐ NFRC-R6	6" Fire Rated	☐ W2	Regressed Baffle			

Example: **NFRC-R4W2TWMPW** = 4" Fire Rated Regressed Baffle, Selectable CCT, Matte Powder White Finish

MOUNTING ACCESSORIES

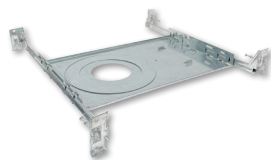

NF-R246
Universal Frame-In



NFC-R430 for 4" only
Frame-In with Collar

Mounting Accessory

- ☐ **NF-R246** Universal Frame-In
- ☐ **NFC-R430** Frame-In with Collar for 4" only

REMOTE EMERGENCY



NEPK-20LEDUNV
20W Emergency Battery



NEPK-23LEDUNV
23W Emergency Battery



NEPK-20/23LEDRTS
Ribbon Test Switch

Emergency Options

- ☐ **NEPK-20LEDUNV** 20W Battery with Remote Test Switch
- ☐ **NEPK-23LEDUNV** 23W Battery with Remote Test Switch
- ☐ **NEPK-20/23LEDRTS** Ribbon Test Switch



Scan for info.




FLAT

4" & 6"



Selectable CCT

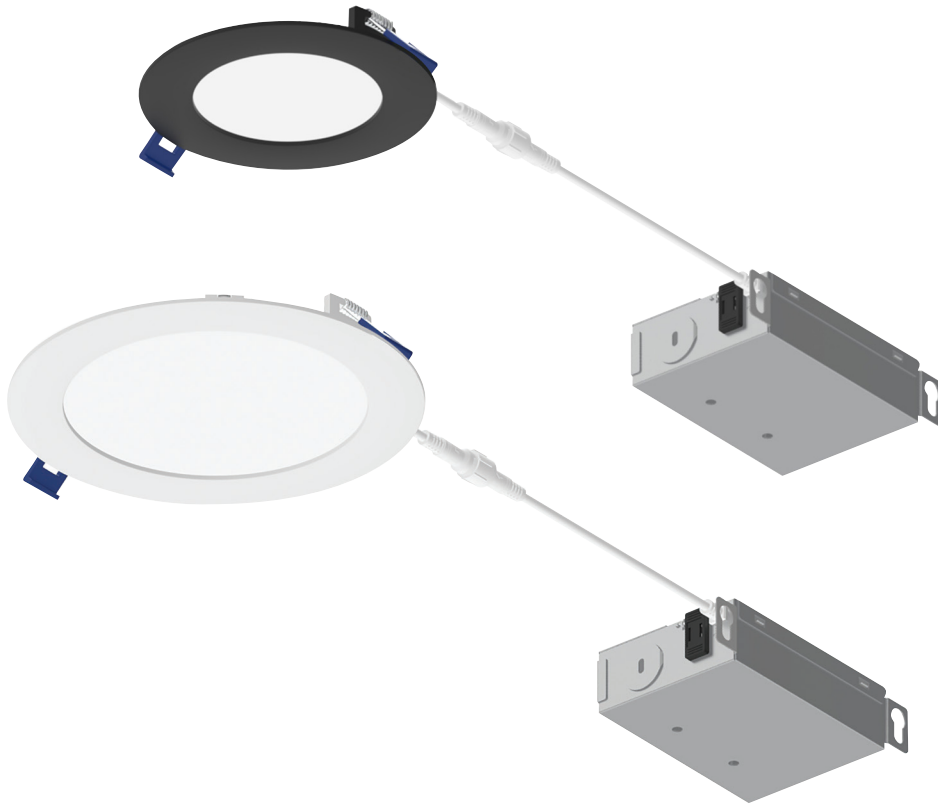

TRIMS

Aperture Size

4" & 6"

Shape

Round

Type

Dead Front Wafer Downlight

Finish



Matte Black



Matte Power White

LIGHT OUTPUT

Lumens / Wattage

4" / 700lm / 10W
6" / 1050lm / 13.5W

Color Temperature

Selectable CCT



Color Rendering Index

90+ CRI

Optic

Fixed - 113° Wide Flood

ELECTRICAL

Input Voltage

120VAC

Dimming

Triac or ELV

Listings & Warranty



IC Rated



Air Tight



cETLus Listed



Wet Location



FCC Compliant




Title 24 Compliant

FLAT

4" & 6"

LUMINAIRES

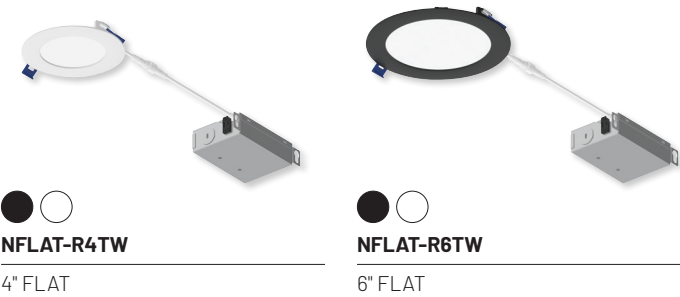

FINISH:


BB = Matte Black

MPW = Matte Powder White


Size	CCT	Finish
☐ NFLAT-R4 4" FLAT	TW Selectable CCT (27K/30K/35K/40K/50K)	☐ B Black
☐ NFLAT-R6 6" FLAT		☐ MPW Matte Power White

Example: **NFLAT-R6TWPW** = 6" FLAT, Selectable CCT, Matte Powder White Finish

NEW CONSTRUCTION FRAME-INS



NF-R246
Universal Frame-In

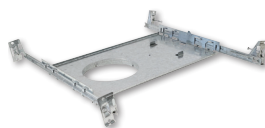

NFC-R430 for 4" FLAT
NQZ-6R-F for 6" FLAT
Frame-In with Collar



NFP-R413 for 4" FLAT
NFP-R613 for 6" FLAT
Frame-In Plate

Frame-Ins

- | | |
|--|----------------------------------|
| ☐ NF-R246 | Universal Frame-In |
| ☐ NFC-R430 | Frame-In with Collar for 4" FLAT |
| ☐ NQZ-6R-F | Frame-In with Collar for 6" FLAT |
| ☐ NFP-R413 | Frame-In Plate for 4" FLAT |
| ☐ NFP-R613 | Frame-In Plate for 6" FLAT |

MOUNTING ACCESSORIES



NEFLINTW-OR
Oversize Ring



NEFLINTW-EW
Extension Cables

Mounting Accessory

- | | |
|--|---------------------------|
| ☐ NEFLINTW-4OR-MPW | Oversize Ring for 4" FLAT |
| ☐ NEFLINTW-6OR-MPW | Oversize Ring for 6" FLAT |
| ☐ NEFLINTW-EW-4 | 4' Extension Cable |
| ☐ NEFLINTW-EW-20 | 20' Extension Cable |

REMOTE EMERGENCY



NEPK-20LEDUNV
20W Emergency Battery



NEPK-23LEDUNV
23W Emergency Battery



NEPK-20/23LEDRTS
Ribbon Test Switch


Emergency Options

- | | |
|--|-------------------------------------|
| ☐ NEPK-20LEDUNV | 20W Battery with Remote Test Switch |
| ☐ NEPK-23LEDUNV | 23W Battery with Remote Test Switch |
| ☐ NEPK-20/23LEDRTS | Ribbon Test Switch |





FLIN
4" & 6"

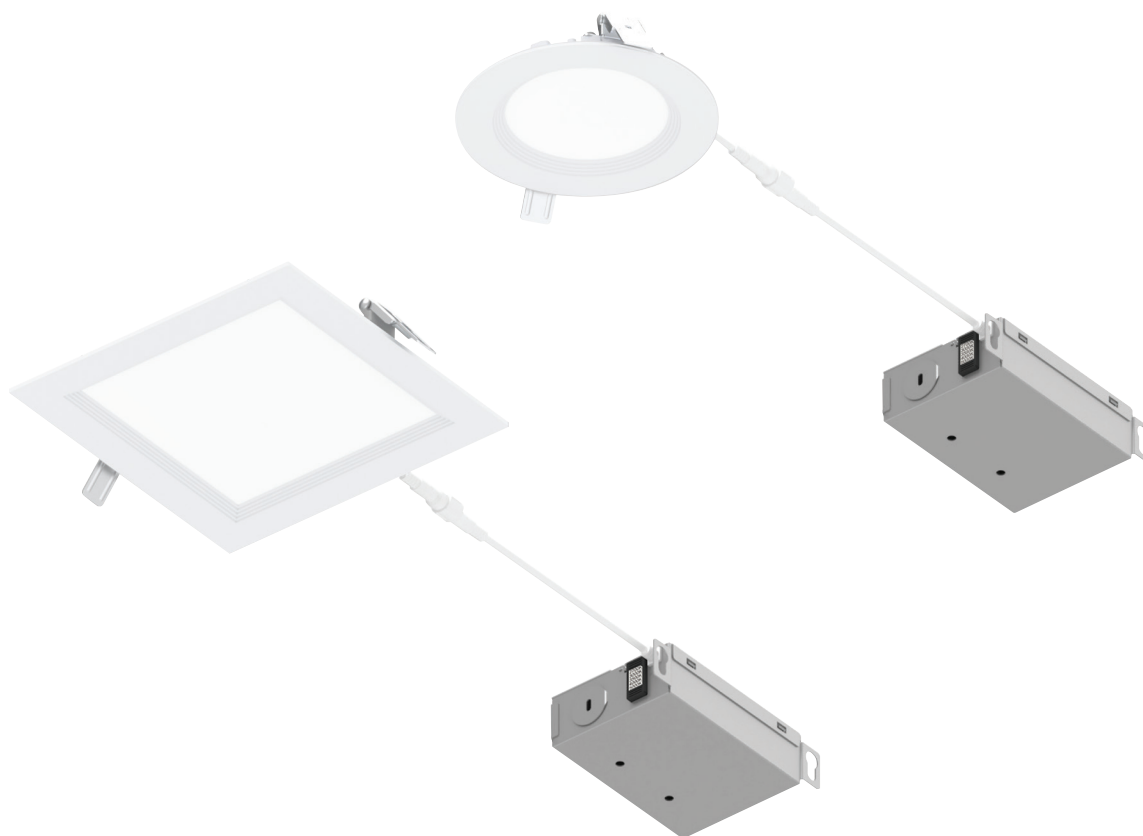

TRIMS

Aperture Size

4" & 6"

Shape

Round or Square

Type

Wafer Downlight with Regressed Baffle

Finish

 Matte Powder White

LIGHT OUTPUT

Lumens / Wattage

4" / 950lm / 10.5W (round)
4" / 650lm / 10.5W (square)
6" / 1300lm / 13.5W (round)
6" / 1150lm / 13.5W (square)

Color Temperature

Selectable CCT



Color Rendering Index

90+ CRI

Optic

Fixed - 115° Wide Flood

ELECTRICAL

Input Voltage

120VAC or 120-277VAC

Dimming

Triac or ELV

Listings & Warranty



IC Rated



Air Tight



cETLus Listed



Wet Location



FCC Compliant



Title 24 Compliant

FLIN

4" & 6"

ROUND LUMINAIRES




FINISH:

☐ **MPW** = Matte Powder White

Size / Shape	CCT	Input Voltage
☐ NEFLINTW-R4MPW 4" Round	Selectable CCT (27K/30K/35K/40K/50K)	☐ (blank) 120V
☐ NEFLINTW-R6MPW 6" Round		☐ LE4 120-277V

Example: **NEFLINTW-R6MPWLE4** = 6" FLIN Round, Selectable CCT, 120-277V input

SQUARE LUMINAIRES

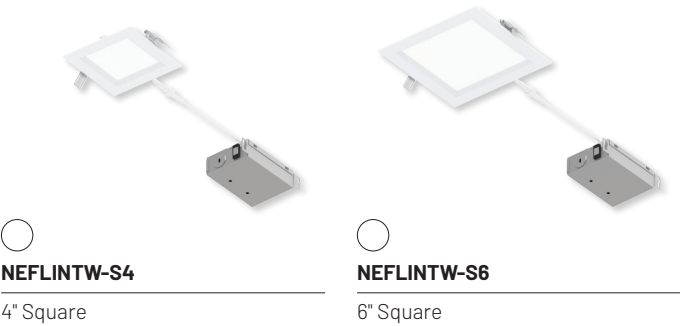


FINISH:

☐ **MPW** = Matte Powder White


Size / Shape	CCT	Input Voltage
☐ NEFLINTW-S4MPW 4" Square	Selectable CCT (27K/30K/35K/40K/50K)	☐ (blank) 120V
☐ NEFLINTW-S6MPW 6" Square		☐ LE4 120-277V

Example: **NEFLINTW-S4MPWLE4** = 4" FLIN Square, Selectable CCT, 120-277V input


NEW CONSTRUCTION FRAME-INS



NF-R246 for Round only
Universal Frame-In

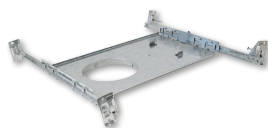

NFC-R430 for 4" Round
NQZ-6R-F for 6" Round
Frame-In with Collar



NFP-S425 for 4" Square
NFP-S625 for 6" Square
Frame-In Plate

Frame-Ins

- ☐ **NF-R246** Universal Frame-In for Round only
- ☐ **NFC-R430** Frame-In with Collar for 4" Round
- ☐ **NQZ-6R-F** Frame-In with Collar for 6" Round
- ☐ **NFP-S425** Frame-In Plate for 4" Square
- ☐ **NFP-S625** Frame-In Plate for 6" Square

MOUNTING ACCESSORIES



NEFLINTW-OR
Oversize Ring



NEFLINTW-EW
Extension Cables

Mounting Accessory

- ☐ **NEFLINTW-4OR-MPW** Oversize Ring for 4" Round
- ☐ **NEFLINTW-6OR-MPW** Oversize Ring for 6" Round
- ☐ **NEFLINTW-EW-4** 4' Extension Cable
- ☐ **NEFLINTW-EW-20** 20' Extension Cable

REMOTE EMERGENCY



NEPK-20LEDUNV
20W Emergency Battery



NEPK-23LEDUNV
23W Emergency Battery



NEPK-20/23LEDRTS
Ribbon Test Switch

Emergency Options

- ☐ **NEPK-20LEDUNV** 20W Battery with Remote Test Switch
- ☐ **NEPK-23LEDUNV** 23W Battery with Remote Test Switch
- ☐ **NEPK-20/23LEDRTS** Ribbon Test Switch



Scan for info.




FLIN ADJUSTABLE

4" & 6"



Selectable CCT

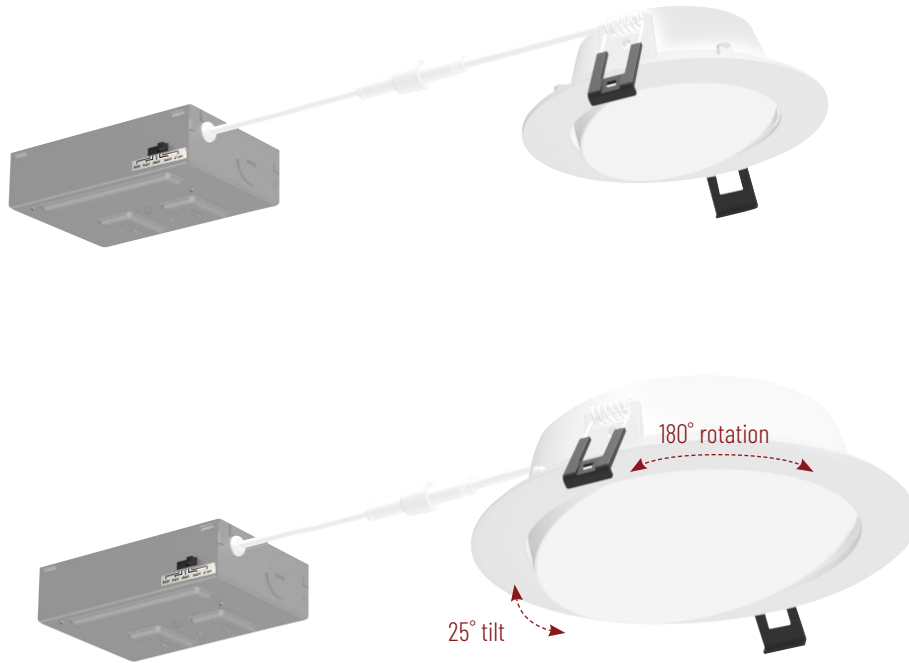

TRIMS

Aperture Size

4" & 6"

Shape

Round

Type

Adjustable Wafer Downlight
25° Tilt & 180° Rotation

Finish



Matte Powder White

LIGHT OUTPUT

Lumens / Wattage

4" / 900lm / 10W
6" / 1100lm / 13.5W

Color Temperature

Selectable CCT



Color Rendering Index

90+ CRI

Optic

Fixed - 114° Wide Flood

ELECTRICAL

Input Voltage

120VAC

Dimming

Triac or ELV

Listings & Warranty



IC Rated



Air Tight



cETLus Listed



Wet Location



FCC Compliant



Title 24 Compliant

FLIN ADJUSTABLE

4" & 6"

LUMINAIRES



Selectable CCT

FINISH:

 **MPW** = Matte Powder White

 **NFLINA-R4TW**

4" FLIN Adjustable


 **NFLINA-R6TW**

6" FLIN Adjustable


Size		CCT	Finish
☐ NFLINA-R4	4" FLIN Adjustable	TW Selectable CCT (27K/30K/35K/40K/50K)	MPW Matte Power White
☐ NFLINA-R6	6" FLIN Adjustable		

Example: **NFLINA-R6TWMPW** = 6" FLIN Adjustable, Selectable CCT, Matte Powder White Finish

NEW CONSTRUCTION FRAME-INS

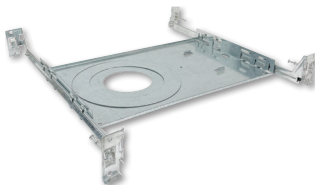

NF-R246
Universal Frame-In

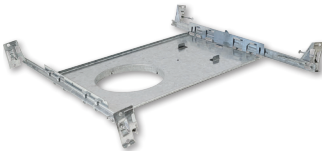

NFC-R430
NQZ-6R-F
Frame-In with Collar



NFP-R413
NFP-R613
Frame-In Plate

Frame-Ins

- | | |
|--|----------------------------------|
| ☐ NF-R246 | Universal Frame-In |
| ☐ NFC-R430 | Frame-In with Collar for 4" only |
| ☐ NQZ-6R-F | Frame-In with Collar for 6" only |
| ☐ NFP-R413 | Frame-In Plate for 4" only |
| ☐ NFP-R613 | Frame-In Plate for 6" only |

REMOTE EMERGENCY



NEPK-20LEDUNV
20W Emergency Battery



NEPK-23LEDUNV
23W Emergency Battery



NEPK-20/23LEDRTS
Ribbon Test Switch


Emergency Options

- | | |
|--|-------------------------------------|
| ☐ NEPK-20LEDUNV | 20W Battery with Remote Test Switch |
| ☐ NEPK-23LEDUNV | 23W Battery with Remote Test Switch |
| ☐ NEPK-20/23LEDRTS | Ribbon Test Switch |





THEIA
4", 6" & 8"

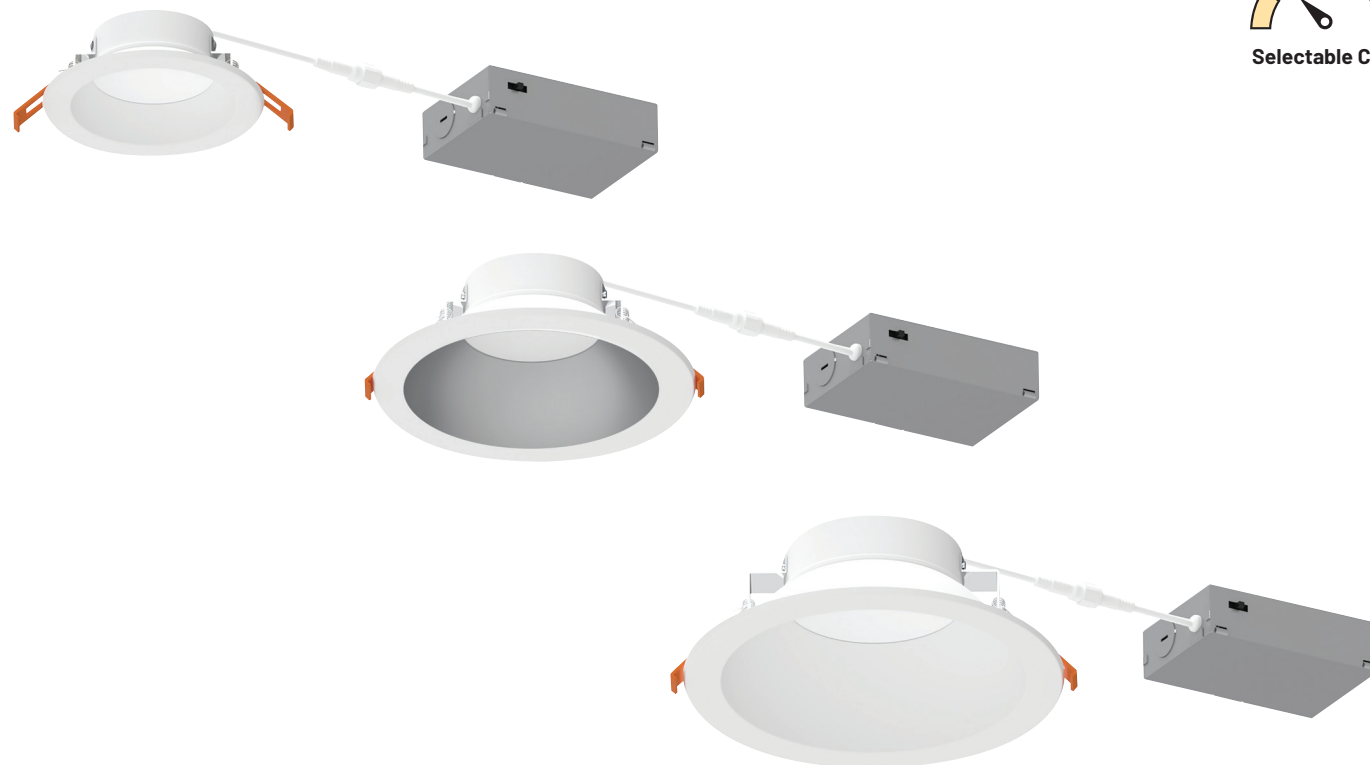

TRIMS

Aperture Size

4", 6" & 8"

Shape

Round

Type

Deep Downlight

Finish

-  Haze / Matte Powder White
-  Matte Powder White

LIGHT OUTPUT

Lumens / Wattage

4" / 950lm / 10W
6" / 1400lm / 15W
8" / 2100lm / 22W

Color Temperature

Selectable CCT



Color Rendering Index

90+ CRI

Optic

Fixed - 94° Flood

ELECTRICAL

Input Voltage

120VAC or 120-277VAC

Dimming

Triac or ELV (120V)
0-10V (120-277V)

Listings & Warranty

-  IC Rated
-  Air Tight
-  cETLus Listed
-  Wet Location
-  FCC Compliant
-  Title 24 Compliant

THEIA

4", 6" & 8"

LUMINAIRES





Selectable CCT



NLTH-41TW
4" Theia



NLTH-61TW
6" Theia



NLTH-81TW
8" Theia

FINISH:



HZMPW = Haze / Matte Powder White




MPW = Matte Powder White


Size	CCT	Finish	Input Voltage / Dimming
☐ NLTH-41	4" Theia	☐ HZMPW Haze / Matte Power White	☐ (blank) 120V; Triac/ELV
☐ NLTH-61	6" Theia	☐ MPW Matte Power White	☐ LE4 120-277V; 0-10V
☐ NLTH-81	8" Theia		

Example: NLTH-61TWHZMPW = 6" Theia, Selectable CCT, Haze Reflector / Matte Powder White Flange

NEW CONSTRUCTION FRAME-INS

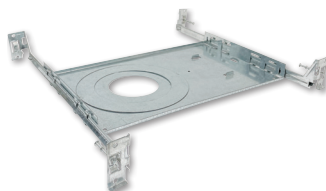

NF-R246 for 4" & 6"
Universal Frame-In

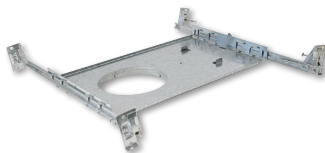

NFC-R430 for 4" only
NQZ-6R-F for 6" only
NFC-R725 for 8" only
Frame-In with Collar



NFP-R413 for 4" only
NFP-R613 for 6" only
NFP-R725 for 8" only
Frame-In Plate

Frame-Ins

- ☐ **NF-R246** Universal Frame-In for 4" & 6" only
- ☐ **NFC-R430** Frame-In with Collar for 4"
- ☐ **NQZ-6R-F** Frame-In with Collar for 6"
- ☐ **NFC-R725** Frame-In with Collar for 8"
- ☐ **NFP-R413** Frame-In Plate for 4"
- ☐ **NFP-R613** Frame-In Plate for 6"
- ☐ **NFP-R725** Frame-In Plate for 8"

REMOTE EMERGENCY



NEPK-23LEDUNV
23W Emergency Battery



NEPK-20/23LEDRTS
Ribbon Test Switch

Emergency Options

- ☐ **NEPK-23LEDUNV** 23W Battery with Remote Test Switch
- ☐ **NEPK-20/23LEDRTS** Ribbon Test Switch



Scan for info.



QUARTZ

4", 6" & 8"



Selectable
Lumens & CCT



TRIMS

Aperture Size

4", 6" & 8"

Shape

Round or Square

Type

Downlight

Finish



Matte Powder White

LIGHT OUTPUT

Lumens / Wattage

Selectable Lumens
4" / 850lm to 1250lm (round)
6" / 1350lm to 2200lm (round)
6" / 1300lm to 2150lm (square)
8" / 1650lm to 2700lm (round)
8" / 2050lm to 3300lm (square)

Color Temperature

Selectable CCT



Color Rendering Index

90+ CRI

Optic

Fixed

ELECTRICAL

Input Voltage

120-277VAC

Dimming

0-10V

Listings & Warranty



IC Rated



Air Tight



cETLus Listed



cETLus Classified



Wet Location



Energy Star Certified



FCC Compliant



Title 24 Compliant

QUARTZ

4", 6" & 8"

ROUND LUMINAIRES




NQZ2-41TWTW
4" Round




NQZ2-61TWTW
6" Round




NQZ2-81TWTW
8" Round



FINISH:
 **MPW** = Matte Powder White

Size / Shape	CCT	Finish
☐ NQZ2-41TW 4" Round	TW Selectable CCT (3000K/3500K/4000K)	MPW Matte Power White
☐ NQZ2-61TW 6" Round		
☐ NQZ2-81TW 8" Round		

Example: **NQZ2-61TWTWMPW** = 6" Quartz Round, Selectable Lumens & CCT, Matte Powder White Finish

SQUARE LUMINAIRES




NQZ2-66TWTW
6" Square




NQZ2-86TWTW
8" Square



FINISH:
 **MPW** = Matte Powder White

Size / Shape	CCT	Finish
☐ NQZ2-66TW 6" Square	TW Selectable CCT (3000K/3500K/4000K)	MPW Matte Power White
☐ NQZ2-86TW 8" Square		

Example: **NQZ2-66TWTWMPW** = 6" Quartz Square, Selectable Lumens & CCT, Matte Powder White Finish

REFLECTOR INSERTS



NQZ-41REFL for 4" only

Reflector Insert



NQZ-61REFL for 6" only

Reflector Insert



NQZ-81REFL for 8" only

Reflector Insert

FINISH:



C = Specular Clear




D = Clear Diffused



HZ = Haze

Reflector Insert Size	Finish
☐ NQZ-41REFL for 4" round	☐ C Specular Clear
☐ NQZ-61REFL for 6" round	☐ D Clear Diffused
☐ NQZ-81REFL for 8" round	☐ HZ Haze

MOUNTING ACCESSORIES

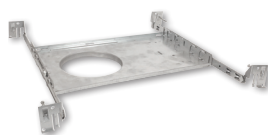

NQZ-4R-F for 4" round
NQZ-6R-F for 6" round
NQZ-8R-F for 8" round

Frame-In with Collar



NQZ-6S-F for 6" square
NQZ-8S-F for 8" square

Frame-In with Collar



NQZ-80R-MPW for 8"

Oversize Ring

Description
☐ NQZ-4R-F Frame-In with Collar for 4" round
☐ NQZ-6R-F Frame-In with Collar for 6" round
☐ NQZ-6S-F Frame-In with Collar for 6" square
☐ NQZ-8R-F Frame-In with Collar for 8" round
☐ NQZ-8S-F Frame-In with Collar for 8" square
☐ NQZ-80R-MPW Oversize Ring for 8" round

REMOTE EMERGENCY



NEPK-20LEDUNV

20W Emergency Battery



NEPK-20/23LEDRTS

Ribbon Test Switch

Emergency Options
☐ NEPK-20LEDUNV 20W Battery with Remote Test Switch
☐ NEPK-20/23LEDRTS Ribbon Test Switch

COMPARISON OF CAN-LESS RECESSED LUMINAIRES



BASIC INFO	Name	M1	M2	M2 Trimless	M4	Iolite Can-less	M-Wave
	Part Number	NM1-170 or NM1-PRDC	NM2	NM2-2RTLDC	NM4	NIOC	NMW
	Aperture	1"	2"	2"	4"	1", 2" and 4"	2" and 4"
PERFORMANCE	Lumens	100lm or 600lm	400lm to 850lm	750lm or 900lm	950lm or 1100lm	750lm or 900lm	750lm or 1250lm
	CCT	2700K or 3000K	2700K, 3000K or 4000K	2700K, 3000K or 4000K	2700K or 3000K	2700K, 3000K, 3500K, 4000K or Comfort Dim	2700K or 3000K
	Input Voltage	12VDC or 120VAC	120VAC	120VAC	120VAC	120VAC	120VAC
	Dimming	Triac or ELV	Triac or ELV	Triac or ELV	Triac or ELV	Triac or ELV	Triac or ELV
APPLICATION	Trim Types	Round or Square	Round, Square, Adjustable, Multiples	Trimless	Round, Square, Adjustable	Round, Square, Adjustable, Pinhole	Adjustable
	Finishes	Black, Bronze, White	Black or White	Black or White	Black or White	Black, Haze or White	Black or White
	Beam Spread	Field Changeable (12V) Fixed (120V)	Fixed (Elbow includes two)	Fixed	Fixed (Elbow includes two)	Field Changeable (Three Included)	Field Changeable
	Accessory	Trims, Frame-In, Cables	Trims, Frame-In, Cables	Mud Plate, Cables	Trims, Frame-In, Cables	Frame-In, Cables, Optics	Frame-In, Cables, Optics
CUSTOMIZATION	Installation Type	IC (12V) ICAT (120V)	IC Air-Tight	IC Air-Tight	IC Air-Tight	IC Air-Tight	IC Air-Tight
	Listing	Wet	Damp or Wet	Damp	Damp or Wet	Damp or Wet	Wet
	Title 24	No (12V) Yes (120V)	Yes	Yes	Yes	Yes	Yes

COMPARISON OF CAN-LESS RECESSED LUMINAIRES



BASIC INFO	Name	M-Curve	Fire Rated	FLAT	FLIN	FLIN Adjustable	Theia	Quartz
	Part Number	NMC	NFRC	NFLAT	NEFLINTW	NFLINA	NLTH	NQZ2
	Aperture	4" and 6"	4" and 6"	4" and 6"	4" and 6"	4" and 6"	4", 6" and 8"	4", 6" and 8"
PERFORMANCE	Lumens	900lm or 1300lm	1150lm to 1550lm	700lm or 1050lm	650lm to 1300lm	900lm or 1100lm	950lm to 2100lm	1250lm to 3300lm
	CCT	Selectable CCT (27K/30K/35K/ /40K/50K)	Selectable CCT (27K/30K/35K/ /40K/50K)	Selectable CCT (27K/30K/35K/ /40K/50K)	Selectable CCT (27K/30K/35K/ /40K/50K)	Selectable CCT (27K/30K/35K/ /40K/50K)	Selectable CCT (27K/30K/35K/ /40K/50K)	Selectable CCT (30K/35K/40K)
	Input Voltage	120VAC	120VAC	120VAC	120VAC or 120-277VAC	120VAC	120VAC or 120-277VAC	120-277VAC
	Dimming	Triac or ELV	Triac or ELV	Triac or ELV	Triac or ELV	Triac or ELV	Triac/ELV or 0-10V	0-10V
APPEARANCE	Trim Types	Adjustable	Flat or Baffle	Round Non-Metallic	Round or Square Baffle	Adjustable	Reflector	Reflector
	Finishes	White	White	Black or White	White	White	Haze or White	White (inserts available)
	Beam Spread	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
	Accessory	Frame-In	Frame-In	Frame-In, Cables	Frame-In, Cables	Frame-In	Frame-In, Emergency	Inserts, Frame-In, Emergency
CUSTOMIZATION	Installation Type	IC Air-Tight	IC Air-Tight	IC Air-Tight	IC Air-Tight	IC Air-Tight	IC Air-Tight	IC Rated
	Listing	Wet	Wet	Wet	Wet	Wet	Wet	Wet
	Title 24	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Notes

**NORA LIGHTING, INC.**

6505 Gayhart St.
Commerce, CA 90040
TEL 323.767.2600
FAX 323.722.3677
www.NoraLighting.com

DOMESTIC FACILITIES:

Cincinnati, OH
Dallas, TX
Detroit, MI
Edison, NJ
Los Angeles, CA
Minneapolis, MN
Nashville, TN

INTERNATIONAL SALES:

6505 Gayhart St.
Commerce, CA 90040
TEL 323.767.2600
FAX 323.722.3677

The products shown in this catalog
are covered by USA and International
patents. Specifications subject to
change without notice.

© Copyright 2025 Nora Lighting, Inc.
All rights reserved

7M ML-RECCANC0625

